

Gecko-Front Specification

Geeko-Front Kits

Geeko Model	Mini-25052 F	Mini-25070 F	Mini-35070 F	Solid-25100 F	Solid-35100 F	Prime-25078 F	Prime-35078 F	Prime-25100 F	Prime-35100 F	Max-25150 F	Max-35150 F	Max-50100F
Motor Model	MT-3625F	MT-3625F	MT-3635F	MT-3625F	MT-3635F	MT-3625F	MT-3635F	MT-3625F	MT-3635F	MT-3625F	MT-3635F	MT-4850F
Motor Power	36V250W	36V250W	36V350W	36V250W	36V350W	36V250W	36V350W	36V250W	36V350W	36V250W	36V350W	48V500W
Battery Model	GB-36052-Mini-B3	GB-36070-Mini-B3		GB-36100-Solid-B3		GB-36078-Prime-B3		GB-36100-Prime-B3		GB-36150-Max-B3		GB-48100-Max-B3
Bottle	Mini			Solid		Prime				Max		
Battery Capacity	36V5.2AH	36V7.0AH		36V10.0AH		36V7.8AH		36V10.0AH		36V15.0AH		48V10.0AH


Charger	42V2A			42V3A		42V2A		42V3A		42V3A		54.6V3A
Mileage in PAS mode at level 1 (km)*	65	85		130		95		130		200		130
Mileage in throttle mode (km)*	N/A	N/A	28	N/A	40	N/A	30	N/A	40	N/A	60	40
<p>*Regarding the mileage, it is obtained under the following ideal conditions: flat road, no wind, 30 degrees Celsius, the rider's weight is 60KG, the actual mileage will vary due to different conditions</p>												

Geeko Front Motors


Geeko Front Motor			
Motor Model	MT-3625F	MT-3635F	MT-4850F
Power	250W	350W	500W
Rated Voltage(V)	36		48
RPM	290	350	450
Contruction	Gear Drive		
Gear Ratio	4.33		
Torque(NM)	38	40	48
Weight	2.5		3.5
Diameter(mm)	120		150

Efficiency(%)	>80%			
Cable & Connector	9 pins waterproof connector			
PAS Sensor	N/A			
Spoke Holes	36			
Brake	Disc brake or V brake			
Installation Width (mm/OLD)	100			
Max. Speed (KM/H)	20"	25	29	38
	26"	32	38	49
	27.5"	34	40	52
	700C	35	41	53
Waterproof	IP65			
Certificates	CE			

Geeko Front 250W/350W Motor

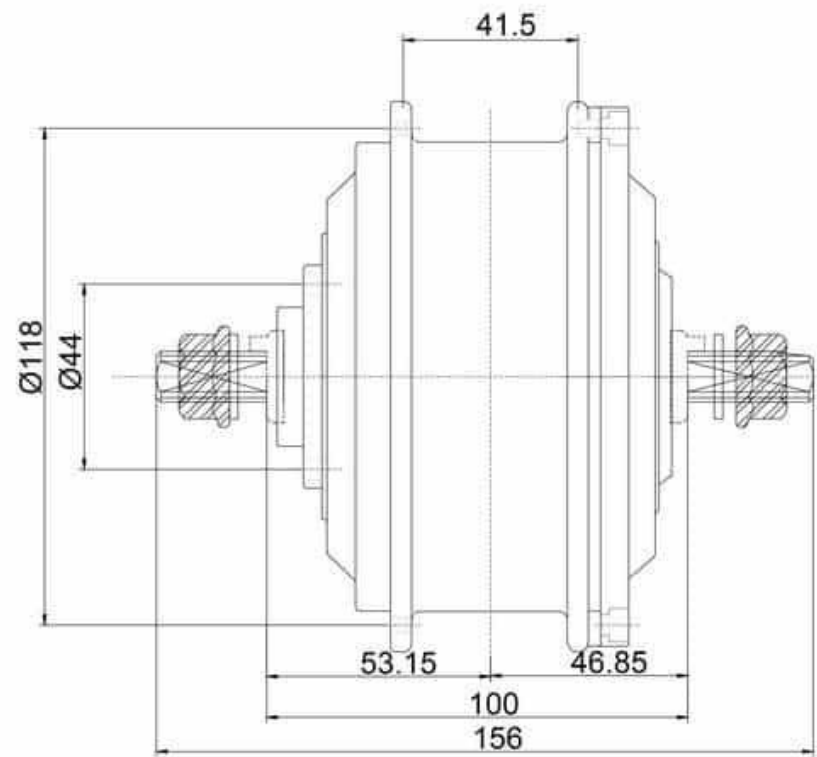


Geeko Front 500W Motor

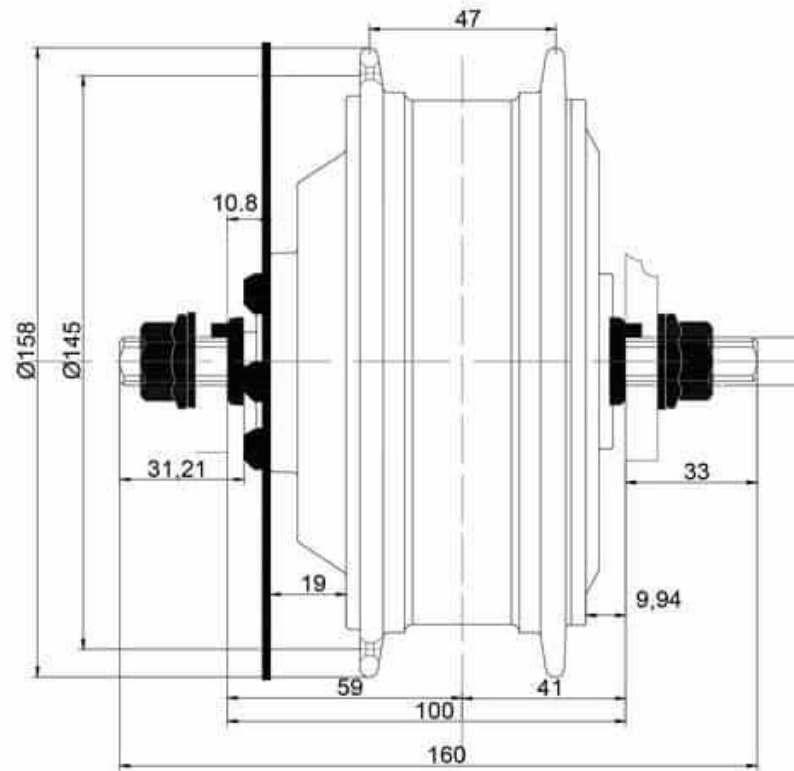


Geeko Bottles


Geeko-Mini-C

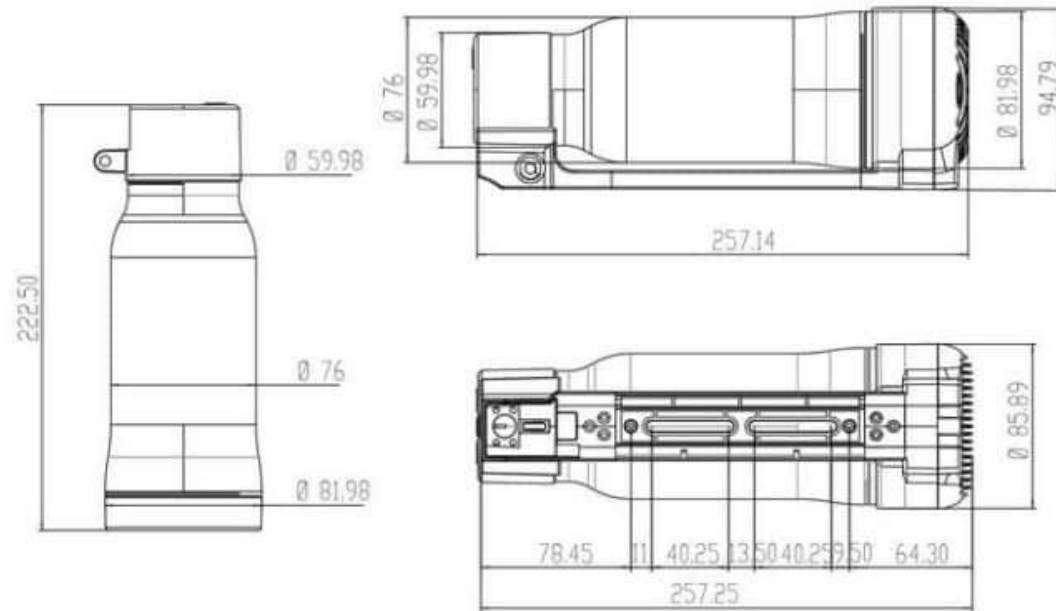


Geeko-Solid-C

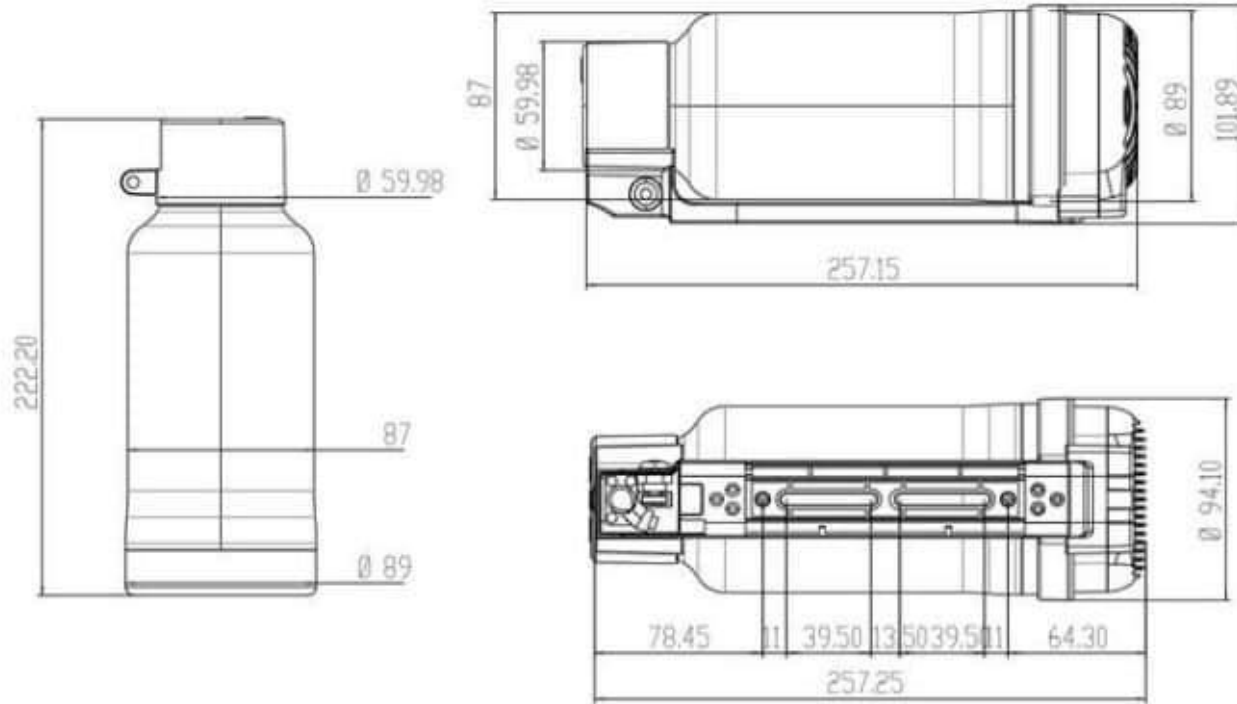

Geeko-Prime-C

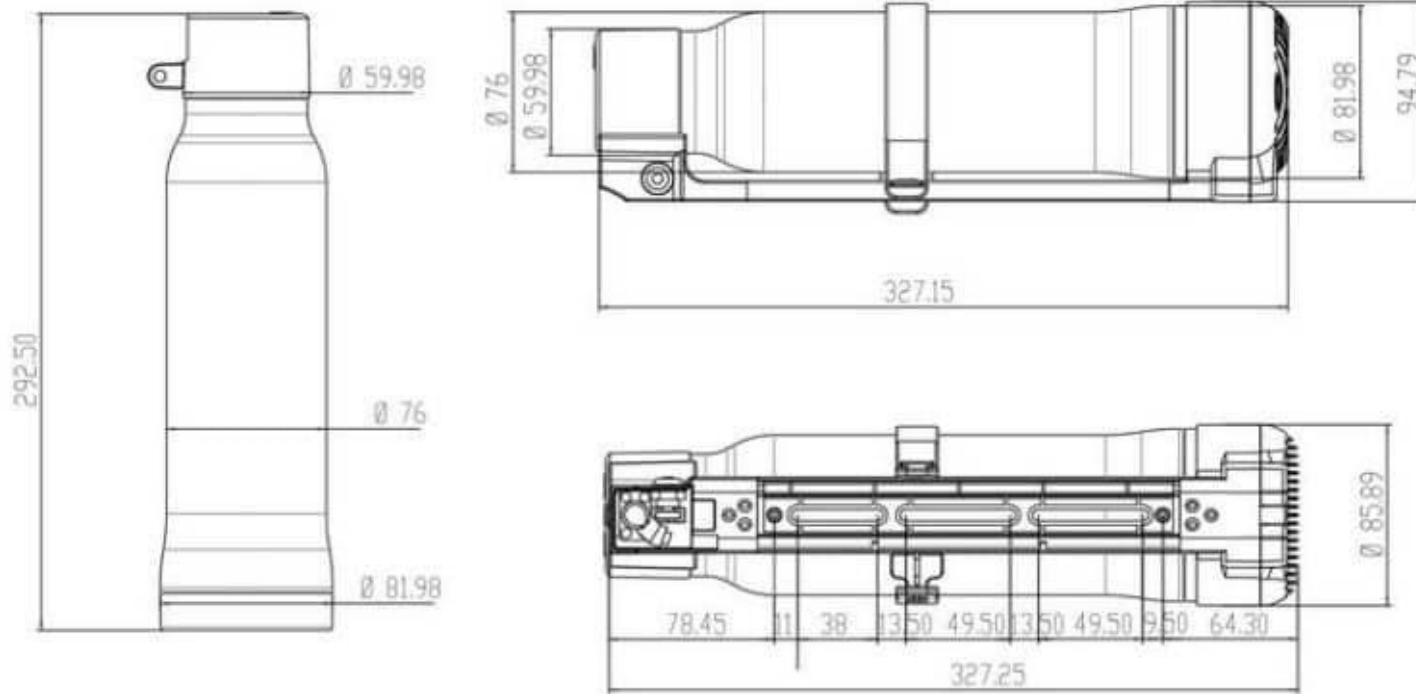

Geeko-Max-C

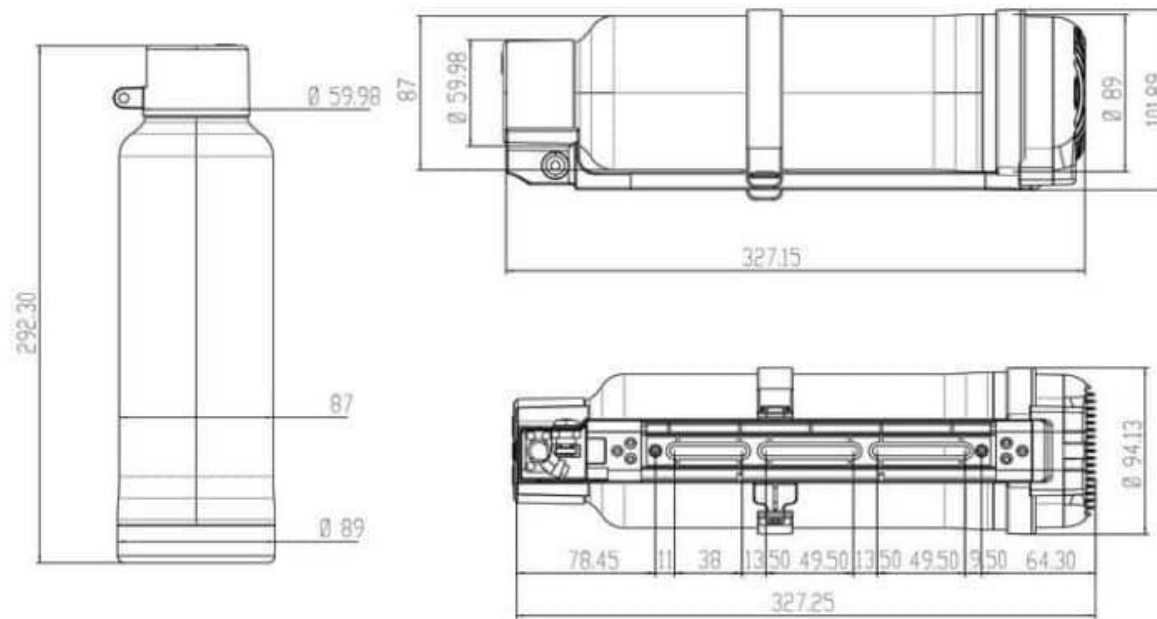

Geeko Batteries

Model	GB-36052- Mini-B3	GB-36070- Mini-B3	GB-36100- Solid-B3	GB-36078- Prime-B3	GB-36100- Prime-B3	GB-36150- Max-B3	GB-48100- Max-B3
Bottle Case	Mini	Mini	Solid	Prime	Prime	Max	Max
Capacity	36V 5.2AH	36V 7.0AH	36V 10.0AH	36V 7.8AH	36V 10.0AH	36V 15.0AH	48V 10.0AH
Panel	B3						
Height(mm)	222.5	222.5	222.5	292.5	292.5	292.5	292.5
Diameter(mm)	76	76	87	76	76	87	87
Weight(kg)	1.5	1.5	1.8	1.9	1.9	2.6	2.3
Cell Type	18650	18650	21700	18650	21700	21700	21700
Cell Brand	DC	LG/Samsung	LG/Samsung	DC	LG/Samsung	LG/Samsung	LG/Samsung
Waterproof	IPX7						

Items Weight

Items	Weight(KG)	
Battery	Mini	1.3
	Prime	1.8
	Max	2.6
Motor Wheel	250W	2.6
	350W	2.6
	500W	3.5
Controller	0.4	
Charger	0.5	
Phone Holder	0.2	

Package

Wheel	Package Size(CM)	Package Weight(KG)
20"	50X50X25	9
26"	60X60X25	9
27.5"	60X60X25	9
28" / 29er /700C	65X65X25	9